

# RVM X

The RVM revolution.




Reliable, fast, compact, strong and clean design.

## RVM X

***“The RVM revolution”*** - RVM X is a machine with high strength and reliability. The modulated system is very compact and therefore also easy to adapt to the store size and needs. RVM X can be delivered as a single or double machine and can be combined with how many compactor cabinets you like. RVM X can also be delivered with crate recognition.

RVM X accepts all kind of empties.



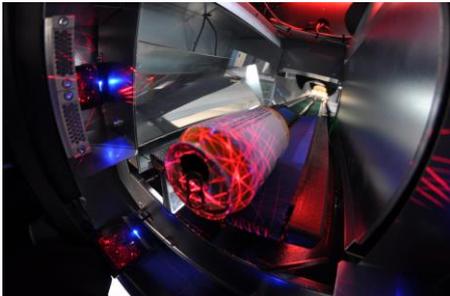

<b>RVM X</b>	
<b>TECHNICAL SPECIFICATION</b>	
Infeed of CAN and PET:	Horizontal infeed. One opening for all bottles and CANS.
Registration-/infeed speed:	Up to 60 units per minute, up to 15 crates per minute
Beverage container types:	GLASS, CAN, PET, Ref-PET and CRATES
Beverage container sizes:	0.15 - 3 litre
Memory:	100 000 empty types
Recognition of empties:	360° bar code reader, Video system
Bar code:	EAN-13, EAN-8, UPC-E, UPC-A
Weight:	Electronic weight system
Control system:	PC with Linux operating system
<b>STORING</b>	
Glass:	Euro Pallet for OWG or Soft Drop 1/2 Pallet size
One way PET:	*Approx. 870 units normal mix (Euro Pallet)
CANS:	*Approx. 3.500 units normal mix (Euro Pallet)
<b>ELECTRICITY</b>	
Electricity:	1 pc 400V or 230V three phase/16A
<b>ENERGY CONSUMPTION</b>	
Rest modus:	110W
Operating:	190 - 2700W
Battery back-up for PC included	
<b>ENVIRONMENT</b>	
Temperature:	5-40 °C
Relative humidity:	Max 90% - non-condensing
<b>ALARM SYSTEM</b>	
Information on display, light signal, optional sound signal. SMS, e-mail, telephone and voice mail	
<b>DISPLAY</b>	
10,4" touch colour display with back light.	
<b>PRINTER</b>	
Graphic thermo printer for logos and bar codes. Approx 1700 receipts per roll.	
<b>REMOTE CONTROL AND MONITORING - BACK OFFICE</b>	
Storage of data in the machine. Event log with detailed information. Status can be viewed on screen and printer. Online pro-active monitoring and analysis via LAN	
<b>MARKETING</b>	
As an option the machines can be used for marketing and information for the store/chain. Donation function is also an option.	
<b>SECURITY AND APPROVAL</b>	
EN 60335-1, EN62233, EN61000-6, CE approved according to directive. Low voltage 2014/35/EU, EMC-direktive , machine directive 2006/42/EC (NS-EN ISO 12100:2010 2014/30/EU)	

Specification may change without notice.

RVM X – A modular system.  
Add as many compactor cabinets you need.



Or add an extra RVM X machine front to the compactor cabinet.



RVM X – Bottle table and bottle raiser

